


# TYPICAL FOUNDATION CROSS SECTION

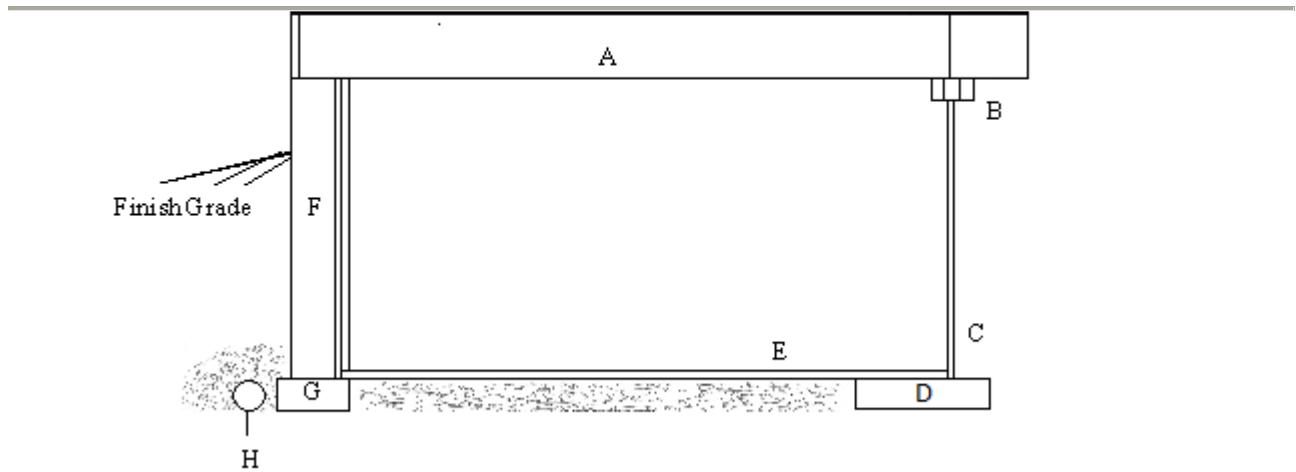

## A. FLOOR

Subfloor \_\_\_\_\_  
Joists \_\_\_\_\_ X \_\_\_\_\_ - \_\_\_\_\_ on center

## B. BEAM

Size \_\_\_\_\_ X \_\_\_\_\_ # of Plies \_\_\_\_\_ LVL \_\_\_\_\_  
Spacing between supports \_\_\_\_\_

## C. COLUMNS

Telepost \_\_\_\_\_ 6" X 6" Wood \_\_\_\_\_ Other \_\_\_\_\_

## D. CONCRETE PAD FOOTINGS

Size \_\_\_\_\_ X \_\_\_\_\_ X \_\_\_\_\_ Reinforced:  Yes  No

## E. CONCRETE FLOOR SLAB

Slab thickness \_\_\_\_\_ Gravel thickness \_\_\_\_\_ c/w 6 mil poly \_\_\_\_\_

## F. FOUNDATION WALL

Exterior Damp proofing  Concrete Wall  ICF

Interior Damp proofing, Min R-8 Insulation, 2' below grade, and 6 mil poly vapour barrier.

**Note:** Preserved Wood Foundations, grade beam with piles or screw piles require engineered stamped plans.

## G. CONCRETE STRIP FOOTINGS

Thickness \_\_\_\_\_ Width \_\_\_\_\_

## H. DRAINAGE ( WEEPING) TILE

Min. 4" weeping tile covered with at least 6" of crushed stone.